




N-type TOPCon

BACKSHEET MONOCRYSTALLINE MODULE

TSM-NE09RC.05 400-430W

430_W / MAXIMUM
POWER OUTPUT

21.5% / MAXIMUM
EFFICIENCY

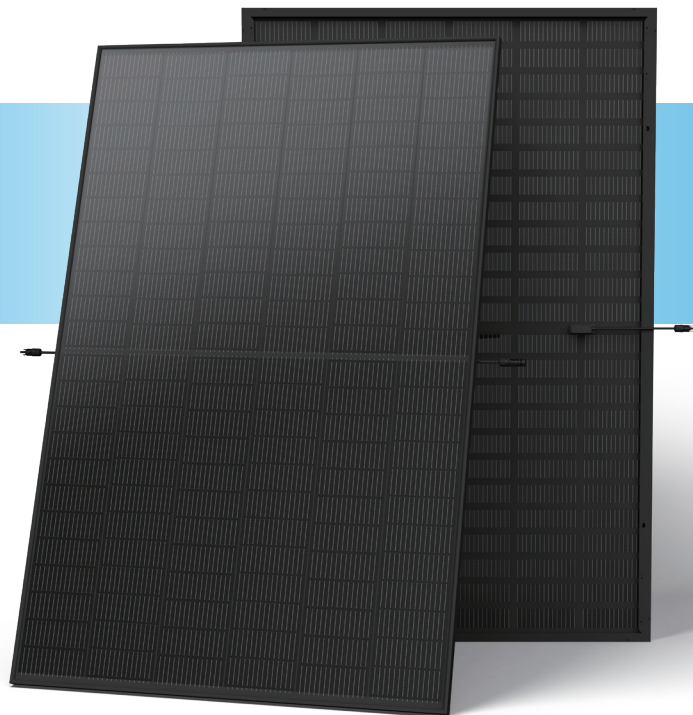

High Customer Value

- Full black design, suitable for residential and C&I rooftop
- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Mechanical performance up to 6000 Pa positive load and 4000 Pa negative load



High Performance

- Up to 21.5% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



High Reliability


- Innovative non-destructive cutting for improved mechanical resistance and strength
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment



High energy yield

- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 25 years power warranty

Performance Warranty

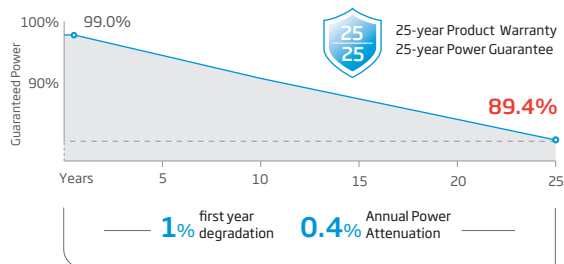

* Please refer to product warranty for details

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716/UL61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



ELECTRICAL DATA (STC & NOCT)

Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Peak Power Watts- $P_{MAX}(W_p)^*$	400	305	405	309	410	312	415	317	420	320	425	324
Power Selection (W)**	0 ~ +5											
Maximum Power Voltage- V_{MPP} (V)	41.3	38.6	41.7	39.0	42.1	39.4	42.5	39.8	42.8	40.1	43.2	40.5
Maximum Power Current- I_{MPP} (A)	9.68	7.88	9.71	7.91	9.73	7.93	9.77	7.96	9.80	7.98	9.84	8.01
Open Circuit Voltage- V_{oc} (V)	49.2	46.7	49.6	47.1	50.1	47.6	50.5	47.9	50.9	48.3	51.4	48.8
Short Circuit Current- I_{sc} (A)	10.30	8.30	10.33	8.32	10.37	8.36	10.40	8.38	10.43	8.41	10.47	8.44
Module Efficiency η_m (%)	20.0		20.3		20.5		20.8		21.0		21.3	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s. *Measuring tolerance: ±3%. **Power selection up to: +3%.

Electrical characteristics with different power bin (reference to 5% & 10% backside power gain)

Backside Power Gain	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
Peak Power Watts- $P_{MAX}(W_p)$	420	440	425	446	431	451	436	457	441	462	446	468
Maximum Power Voltage- V_{MPP} (V)	41.3	41.3	41.7	41.7	42.1	42.1	42.5	42.5	42.8	42.8	43.2	43.2
Maximum Power Current- I_{MPP} (A)	10.16	10.65	10.20	10.68	10.22	10.70	10.26	10.75	10.29	10.78	10.33	10.82
Open Circuit Voltage- V_{oc} (V)	49.2	49.2	49.6	49.6	50.1	50.1	50.5	50.5	50.9	50.9	51.4	51.4
Short Circuit Current- I_{sc} (A)	10.82	11.33	10.85	11.36	10.89	11.41	10.92	11.44	10.95	11.47	10.99	11.52

Power Bifaciality: 65±10%.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature) 43°C (±2°C)

Temperature Coefficient of P_{MAX} -0.29% /°C

Temperature Coefficient of V_{oc} -0.24% /°C

Temperature Coefficient of I_{sc} 0.04% /°C

Due to different testing methods, the actual performances might differ from the declared specifications.

MAXIMUM RATINGS



Operational Temperature -40~+85°C

Maximum System Voltage 1500V DC (IEC)

1500V DC (UL)


Max Series Fuse Rating 25A

CURVES OF PV MODULE

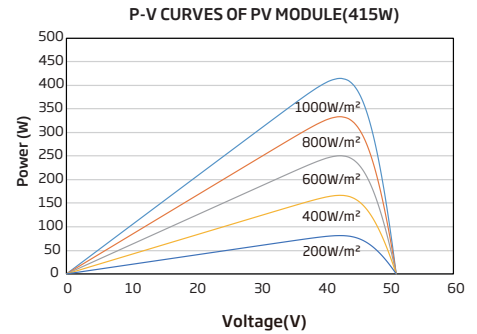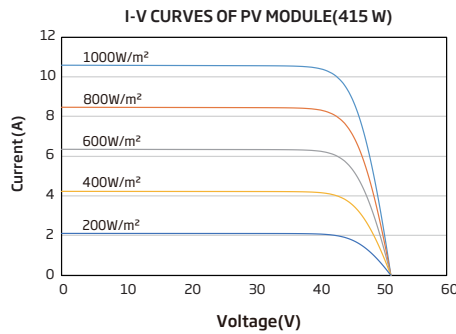

MECHANICAL DATA

Solar Cells	N-type TOPCon Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.3 kg (47.0 lb)
Front Glass	3.2mm (0.13inches), AR Coating Tempered Glass
Backsheet	Transparent Backsheet Black Grid
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Landscape: 1100 mm/1100 mm (43.31/43.31 inches)
Connector	MC4 EV02
Fire Type	Type 1 or Type 2
Packaging	Modules per box: 36 pieces Modules per 40' container: 792 pieces

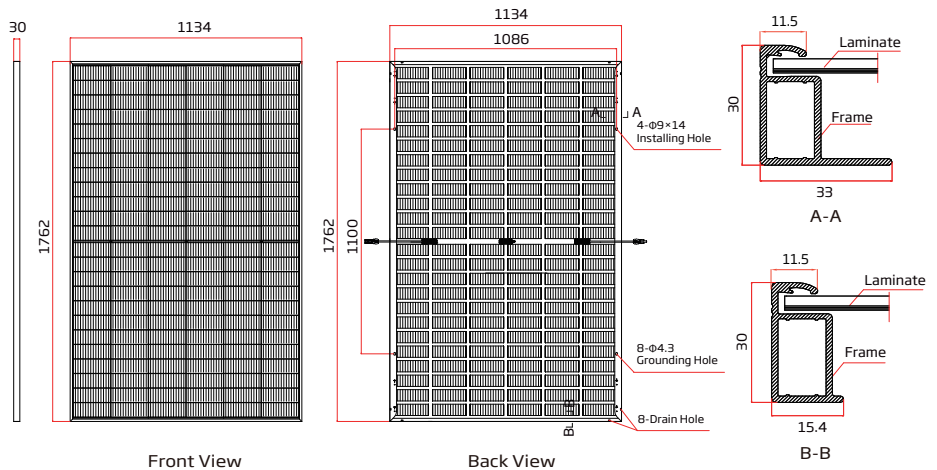

www.trinasolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2024 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co., Ltd.
Version number: TSM_NA_EN_2024_B